
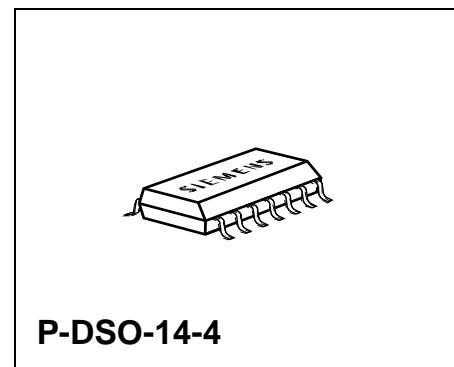


Overview

Features

- Optimized for headlight beam control applications
- Current-peak-blanking (no electrolytic capacitor at V_S)
- Delivers up to 0.8 A continuous
- Low saturation voltage; typ. 1.2 V total @ 25 °C; 0.4 A
- Output protected against short circuit
- Overtemperature protection with hysteresis
- Over- and undervoltage lockout
- No crossover current
- Internal clamp diodes
- Enhanced power packages

| Type | Ordering Code | Package |
|------------|---------------|------------|
| TLE 4206 | Q67000-A9303 | P-DIP-16-5 |
| TLE 4206 G | Q67006-A9299 | P-DSO-14-4 |

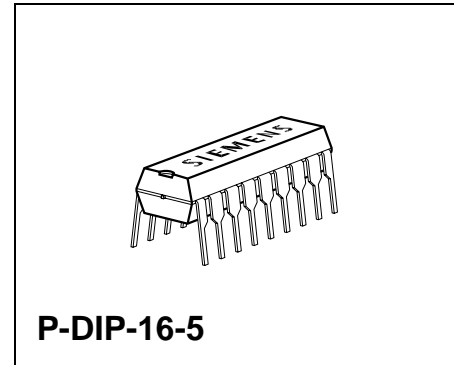

Description

The TLE 4206 is a fully protected H-Bridge Driver designed specifically for automotive headlight beam control and industrial servo control applications.

The part is built using the Siemens bipolar high voltage power technology DOPL.

The standard enhanced power P-DSO-14 package meets the application requirements and saves PCB-board space and costs. A P-DIP-16 package is also available.

The servo-loop-parameter pos.- and neg. Hysteresis, pos.- and neg. deadband and angle-amplification are programmable with external resistors.

An internal window-comparator controls the input line. In the case of a fault condition, like short circuit to GND, short circuit to supply-voltage, and broken wire, the TLE 4206 stops the motor immediately (brake condition).

The “programmable current-peak-blanking” disables the servo-loop during the V_S voltage drop caused by the stall current spike. So there is no need of an electrolytic blocking capacitor at the V_S -terminal.

Furthermore the built in features like over- and undervoltage-lockout, short-circuit-protection and over-temperature-protection will open a wide range of automotive- and industrial applications.

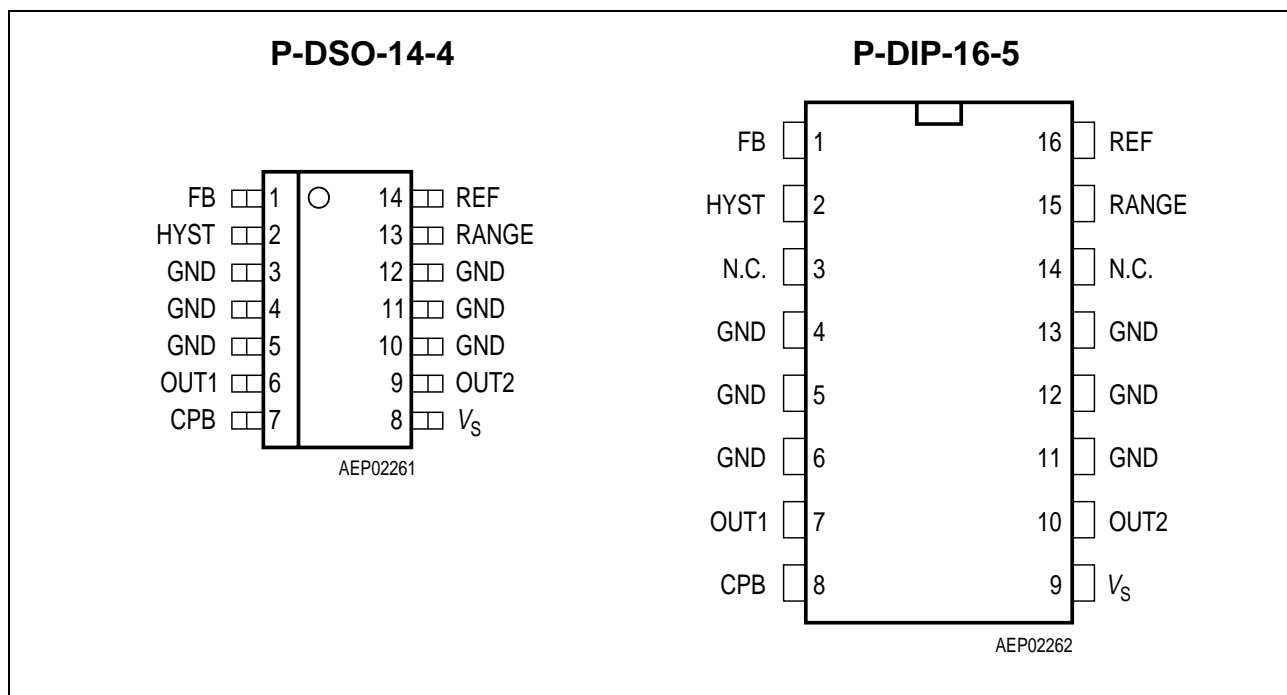


Figure 1 Pin Configuration (top view)

Pin Definitions and Functions

| Pin No. P-DSO-14-4 | Pin No. P-DIP-16-5 | Symbol | Function |
|------------------------|------------------------|----------------|-----------------------------|
| 1 | 1 | FB | Feedback Input |
| 2 | 2 | HYST | Hysteresis I/O |
| 3, 4, 5, 10, 11, 12 | 4, 5, 6, 11, 12, 13 | GND | Ground |
| 6 | 7 | OUT1 | Power Output 1 |
| 7 | 8 | CPB | Current Peak Blanking Input |
| 8 | 9 | V _S | Power Supply Voltage |
| 9 | 10 | OUT2 | Power Output 2 |
| 13 | 15 | RANGE | Range Input |
| 14 | 16 | REF | Reference Input |
| | 3, 14 | N.C. | Not connected |

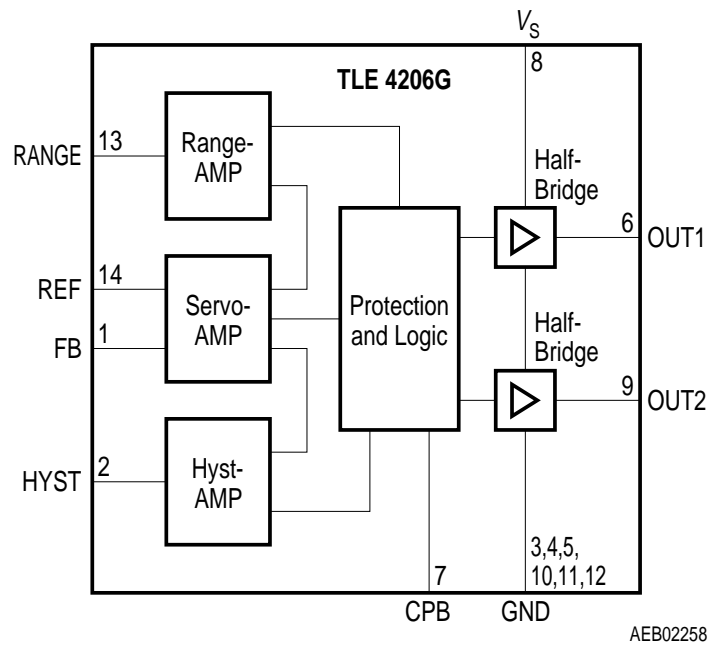


Figure 2 Block Diagram (Pin numbers are valid for TLE 4206 G in P-DSO-14-4)

Absolute Maximum Ratings

| Parameter | Symbol | Limit Values | | Unit | Remarks |
|-----------|--------|--------------|------|------|---------|
| | | min. | max. | | |

Voltages

| | | | | | |
|--|-------|-------|----|---|--|
| Supply voltage | V_S | - 0.3 | 45 | V | - |
| Supply voltage | V_S | - 1 | - | V | $t < 0.5 \text{ s}; I_S > - 2 \text{ A}$ |
| Logic input voltages (FB, REF, RANGE, HYST, CPB) | V_I | - 0.3 | 20 | V | - |

Currents

| | | | | | |
|---|-----------|------------|--------|----------|-------------------------------|
| Output current (OUT1, OUT2) | I_{OUT} | - | - | A | internally limited |
| Output current (Diode) | I_{OUT} | - 1 | 1 | A | - |
| Input current (FB, REF, RANGE, HYST) | I_{IN} | - 2 - 6 | 2 6 | mA mA | $t < 2 \text{ ms}; t/T < 0.1$ |

Temperatures

| | | | | | |
|----------------------|-----------|------|-----|----|---|
| Junction temperature | T_j | - 40 | 150 | °C | - |
| Storage temperature | T_{stg} | - 50 | 150 | °C | - |

Thermal Resistances

| | | | | | |
|----------------------------------|---------------|---|----|-----|-------------------|
| Junction pin (P-DSO-14-4) | $R_{thj-pin}$ | - | 25 | K/W | measured to pin 5 |
| Junction ambient (P-DSO-14-4) | R_{thjA} | - | 65 | K/W | - |
| Junction pin (P-DSO-16-5) | $R_{thj-pin}$ | - | 15 | K/W | measured to pin 5 |
| Junction ambient (P-DSO-16-5) | R_{thjA} | - | 60 | K/W | - |

Note: Maximum ratings are absolute ratings; exceeding any one of these values may cause irreversible damage to the integrated circuit.

Operating Range

| Parameter | Symbol | Limit Values | | Unit | Remarks |
|---------------------------|--------------|--------------|---------------|-------------|---------------------------------------|
| | | min. | max. | | |
| Supply voltage | V_S | 8 | 18 | V | After V_S rising above $V_{UV\ ON}$ |
| Supply voltage increasing | V_S | - 0.3 | $V_{UV\ ON}$ | V | Outputs in tristate |
| Supply voltage decreasing | V_S | - 0.3 | $V_{UV\ OFF}$ | V | Outputs in tristate |
| Output current | I_{OUT1-2} | - 0.8 | 0.8 | A | - |
| Input current (FB, REF) | I_{IN} | - 50 | 500 | μA | - |
| Junction temperature | T_j | - 40 | 150 | $^{\circ}C$ | - |

Electrical Characteristics

$8\text{ V} < V_S < 18\text{ V}$; $I_{\text{OUT}1-2} = 0\text{ A}$; $-40\text{ }^\circ\text{C} < T_j < 150\text{ }^\circ\text{C}$
(unless otherwise specified)

| Parameter | Symbol | Limit Values | | | Unit | Test Condition |
|-----------|--------|--------------|------|------|------|----------------|
| | | min. | typ. | max. | | |

Current Consumption

| | | | | | | |
|----------------|-------|---|----|----|----|---|
| Supply current | I_S | – | 12 | 20 | mA | – |
| Supply current | I_S | – | 20 | 30 | mA | $I_{\text{OUT}1} = 0.4\text{ A}$ $I_{\text{OUT}2} = -0.4\text{ A}$ |
| Supply current | I_S | – | 30 | 50 | mA | $I_{\text{OUT}1} = 0.8\text{ A}$ $I_{\text{OUT}2} = -0.8\text{ A}$ |

Over- and Under Voltage Lockout

| | | | | | | |
|-----------------------|---------------------|------|------|----|---|--|
| UV Switch ON voltage | $V_{\text{UV ON}}$ | – | 7.4 | 8 | V | V_S increasing |
| UV Switch OFF voltage | $V_{\text{UV OFF}}$ | 6 | 6.9 | – | V | V_S decreasing |
| UV ON/OFF Hysteresis | V_{UVHY} | – | 0.5 | – | V | $V_{\text{UV ON}} - V_{\text{UV OFF}}$ |
| OV Switch OFF voltage | $V_{\text{OV OFF}}$ | – | 20.5 | 23 | V | V_S increasing |
| OV Switch ON voltage | $V_{\text{OV ON}}$ | 17.5 | 20 | – | V | V_S decreasing |
| OV ON/OFF Hysteresis | V_{OVHY} | – | 0.5 | – | V | $V_{\text{OV OFF}} - V_{\text{OV ON}}$ |

Electrical Characteristics (cont'd)

$8\text{ V} < V_S < 18\text{ V}$; $I_{\text{OUT}1-2} = 0\text{ A}$; $-40\text{ }^\circ\text{C} < T_j < 150\text{ }^\circ\text{C}$
(unless otherwise specified)

| Parameter | Symbol | Limit Values | | | Unit | Test Condition |
|-----------|--------|--------------|------|------|------|----------------|
| | | min. | typ. | max. | | |

Outputs OUT1-2

Saturation Voltages

| | | | | | | |
|---|--------------------|---|------|------|---|----------------------------------|
| Source (upper) $I_{\text{OUT}} = -0.2\text{ A}$ | $V_{\text{SAT U}}$ | – | 0.85 | 1.15 | V | $T_j = 25\text{ }^\circ\text{C}$ |
| Source (upper) $I_{\text{OUT}} = -0.4\text{ A}$ | $V_{\text{SAT U}}$ | – | 0.90 | 1.20 | V | $T_j = 25\text{ }^\circ\text{C}$ |
| Sink (upper) $I_{\text{OUT}} = -0.8\text{ A}$ | $V_{\text{SAT U}}$ | – | 1.10 | 1.50 | V | $T_j = 25\text{ }^\circ\text{C}$ |
| Sink (lower) $I_{\text{OUT}} = 0.2\text{ A}$ | $V_{\text{SAT L}}$ | – | 0.15 | 0.23 | V | $T_j = 25\text{ }^\circ\text{C}$ |
| Sink (lower) $I_{\text{OUT}} = 0.4\text{ A}$ | $V_{\text{SAT L}}$ | – | 0.25 | 0.40 | V | $T_j = 25\text{ }^\circ\text{C}$ |
| Sink (lower) $I_{\text{OUT}} = 0.8\text{ A}$ | $V_{\text{SAT L}}$ | – | 0.45 | 0.75 | V | $T_j = 25\text{ }^\circ\text{C}$ |

| | | | | | | | |
|------------|---------------------------------|------------------|---|-----|-----|---|--|
| Total drop | $I_{\text{OUT}} = 0.2\text{ A}$ | V_{SAT} | – | 1.0 | 1.4 | V | $V_{\text{SAT}} = V_{\text{SAT U}} + V_{\text{SAT L}}$ |
| Total drop | $I_{\text{OUT}} = 0.4\text{ A}$ | V_{SAT} | – | 1.2 | 1.7 | V | $V_{\text{SAT}} = V_{\text{SAT U}} + V_{\text{SAT L}}$ |
| Total drop | $I_{\text{OUT}} = 0.8\text{ A}$ | V_{SAT} | – | 1.6 | 2.5 | V | $V_{\text{SAT}} = V_{\text{SAT U}} + V_{\text{SAT L}}$ |

Clamp Diodes

| | | | | | | |
|------------------------|------------------|---|-----|-----|----|----------------------|
| Forward voltage; upper | V_{FU} | – | 1 | 1.5 | V | $I_F = 0.4\text{ A}$ |
| Upper leakage current | I_{LKU} | – | – | 5 | mA | $I_F = 0.4\text{ A}$ |
| Forward voltage; lower | V_{FL} | – | 0.9 | 1.4 | V | $I_F = 0.4\text{ A}$ |

Electrical Characteristics (cont'd)

$8\text{ V} < V_S < 18\text{ V}$; $I_{\text{OUT}1-2} = 0\text{ A}$; $-40\text{ }^\circ\text{C} < T_j < 150\text{ }^\circ\text{C}$
(unless otherwise specified)

| Parameter | Symbol | Limit Values | | | Unit | Test Condition |
|-----------|--------|--------------|------|------|------|----------------|
| | | min. | typ. | max. | | |

Input-Interface

Input REF

| | | | | | | |
|-------------------|-------------------|---|-----|---|------------|--|
| Quiescent voltage | $V_{\text{REF}q}$ | – | 200 | – | mV | $I_{\text{REF}} = 0\text{ }\mu\text{A}$ |
| Input resistance | R_{REF} | – | 6 | – | k Ω | $0\text{ V} < V_{\text{REF}} < 0.5\text{ V}$ |

Input FB

| | | | | | | |
|-------------------|------------------|---|-----|---|------------|---|
| Quiescent voltage | $V_{\text{FB}q}$ | – | 200 | – | mV | $I_{\text{FB}} = 0\text{ }\mu\text{A}$ |
| Input resistance | R_{FB} | – | 6 | – | k Ω | $0\text{ V} < V_{\text{FB}} < 0.5\text{ V}$ |

Input/Output HYST

| | | | | | | |
|---|------------------------|-----|------|-----|---------------|--|
| Current Amplification $A_{\text{HYST}} = I_{\text{HYST}} / (I_{\text{REF}} - I_{\text{FB}})$ | A_{HYST} | 0.8 | 0.95 | 1.1 | – | $-20\text{ }\mu\text{A} < I_{\text{HYST}} < -10\text{ }\mu\text{A}$; $10\text{ }\mu\text{A} < I_{\text{HYST}} < 20\text{ }\mu\text{A}$; $I_{\text{REF}} = 250\text{ }\mu\text{A}$ $V_{\text{HYST}} = V_S / 2$ |
| Current Offset | I_{HYSTIO} | – 2 | 0.5 | 3 | μA | $I_{\text{REF}} = I_{\text{FB}} = 250\text{ }\mu\text{A}$ $V_{\text{HYST}} = V_S / 2$ |
| Threshold voltage High | V_{HYH} / V_S | – | 52 | – | % | – |
| Deadband voltage High | V_{DBH} / V_S | – | 50.4 | – | % | – |
| Deadband voltage Low | V_{DBL} / V_S | – | 49.6 | – | % | – |
| Threshold voltage Low | V_{HYL} / V_S | – | 48 | – | % | – |
| Hysteresis Window | V_{HYW} / V_S | 3 | 4 | 5 | % | $(V_{\text{HYH}} - V_{\text{HYL}}) / V_S$ |
| Deadband Window | V_{DBW} / V_S | 0.4 | 0.8 | 1.2 | % | $(V_{\text{DBH}} - V_{\text{DBL}}) / V_S$ |

Electrical Characteristics (cont'd)

$8\text{ V} < V_S < 18\text{ V}$; $I_{\text{OUT}1-2} = 0\text{ A}$; $-40\text{ }^\circ\text{C} < T_j < 150\text{ }^\circ\text{C}$
(unless otherwise specified)

| Parameter | Symbol | Limit Values | | | Unit | Test Condition |
|-----------|--------|--------------|------|------|------|----------------|
| | | min. | typ. | max. | | |

Input RANGE


| | | | | | | |
|-------------------------|--------------------|------|-----|-----|---------------|---------------------------------------|
| Input current | I_{RANGE} | -1 | - | 1 | μA | $0\text{ V} < V_{\text{RANGE}} < V_S$ |
| Switch-OFF voltage High | V_{OFFH} | -100 | 0 | 100 | mV | refer to V_S |
| Switch-OFF voltage Low | V_{OFFL} | 300 | 400 | 500 | mV | refer to GND |

Input CPB (Current Peak Blanking)

| | | | | | | |
|------------------------|--------------------|---|-----|-----|---------------|---|
| Charge current | I_{CPBCH} | - | 6.5 | - | μA | $V_{\text{HYL}} > V_{\text{HYST}}$; $V_{\text{CPB}} = 0\text{ V}$ |
| Low voltage | V_{CPBL} | - | 20 | 100 | mV | $V_{\text{HYL}} < V_{\text{HYST}}$ $< V_{\text{HYH}}$ |
| High voltage threshold | V_{CPBH} | 5 | 5.7 | 6.5 | V | $V_{\text{HYL}} > V_{\text{HYST}}$ |
| Clamp voltage | V_{CPBC} | - | 6.2 | - | V | $V_{\text{HYL}} > V_{\text{HYST}}$ |
| Blanking time | t_{CPB} | - | 40 | - | ms | $C_{\text{CPB}} = 47\text{ nF}$ |

Thermal Shutdown

| | | | | | | |
|--|------------------|-----|-----|-----|------------------|---|
| Thermal shutdown junction temperature | T_{jSD} | 150 | 175 | 200 | $^\circ\text{C}$ | - |
| Thermal switch-on junction temperature | T_{jSO} | 120 | - | 170 | $^\circ\text{C}$ | - |
| Temperature hysteresis | ΔT | - | 30 | - | K | - |

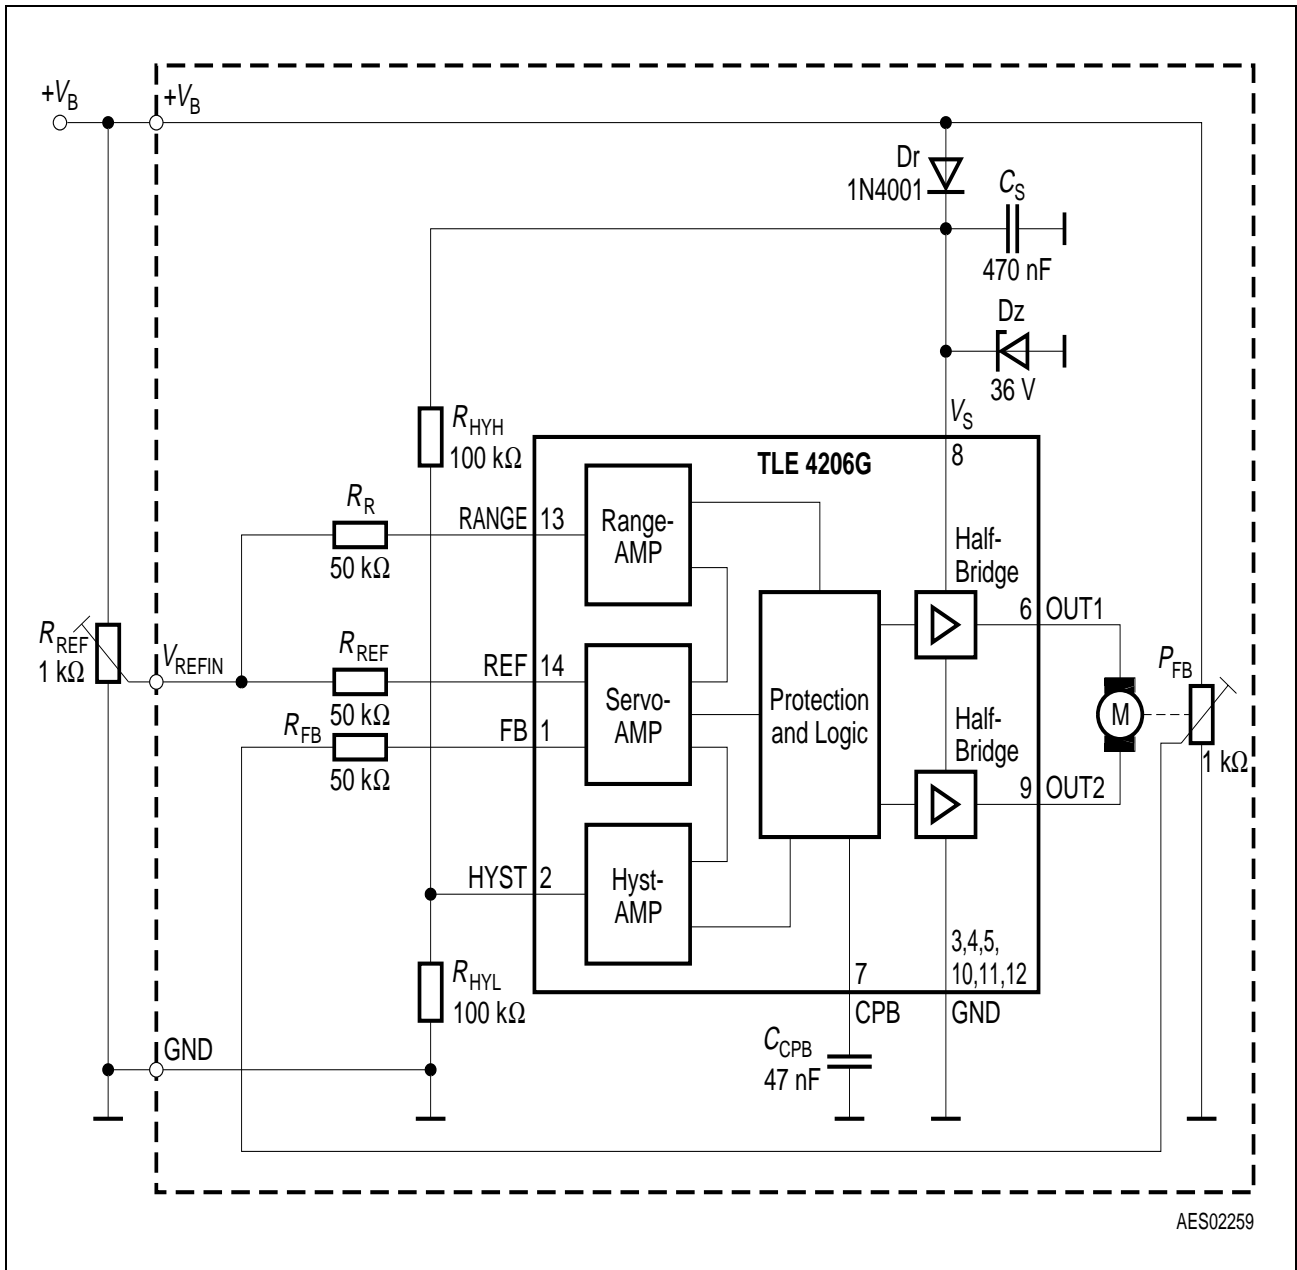

AES02259

Figure 3 Application Circuit (Pin numbers are valid for TLE 4206G in P-DSO-14-4)

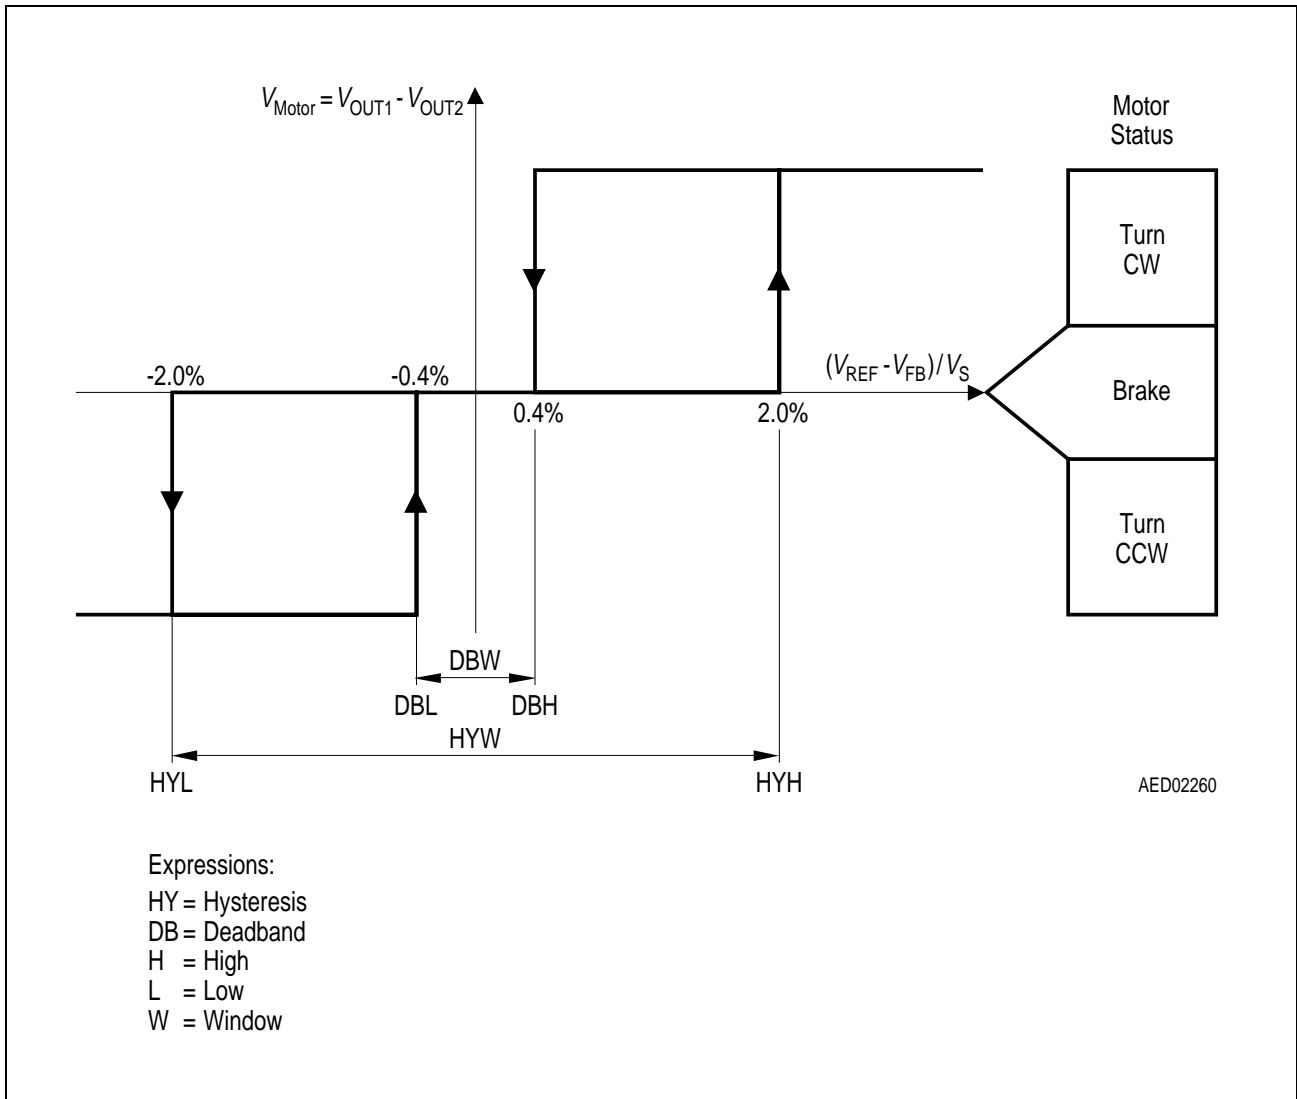


Figure 4 Hysteresis, Phaselag and Deadband-Definitions


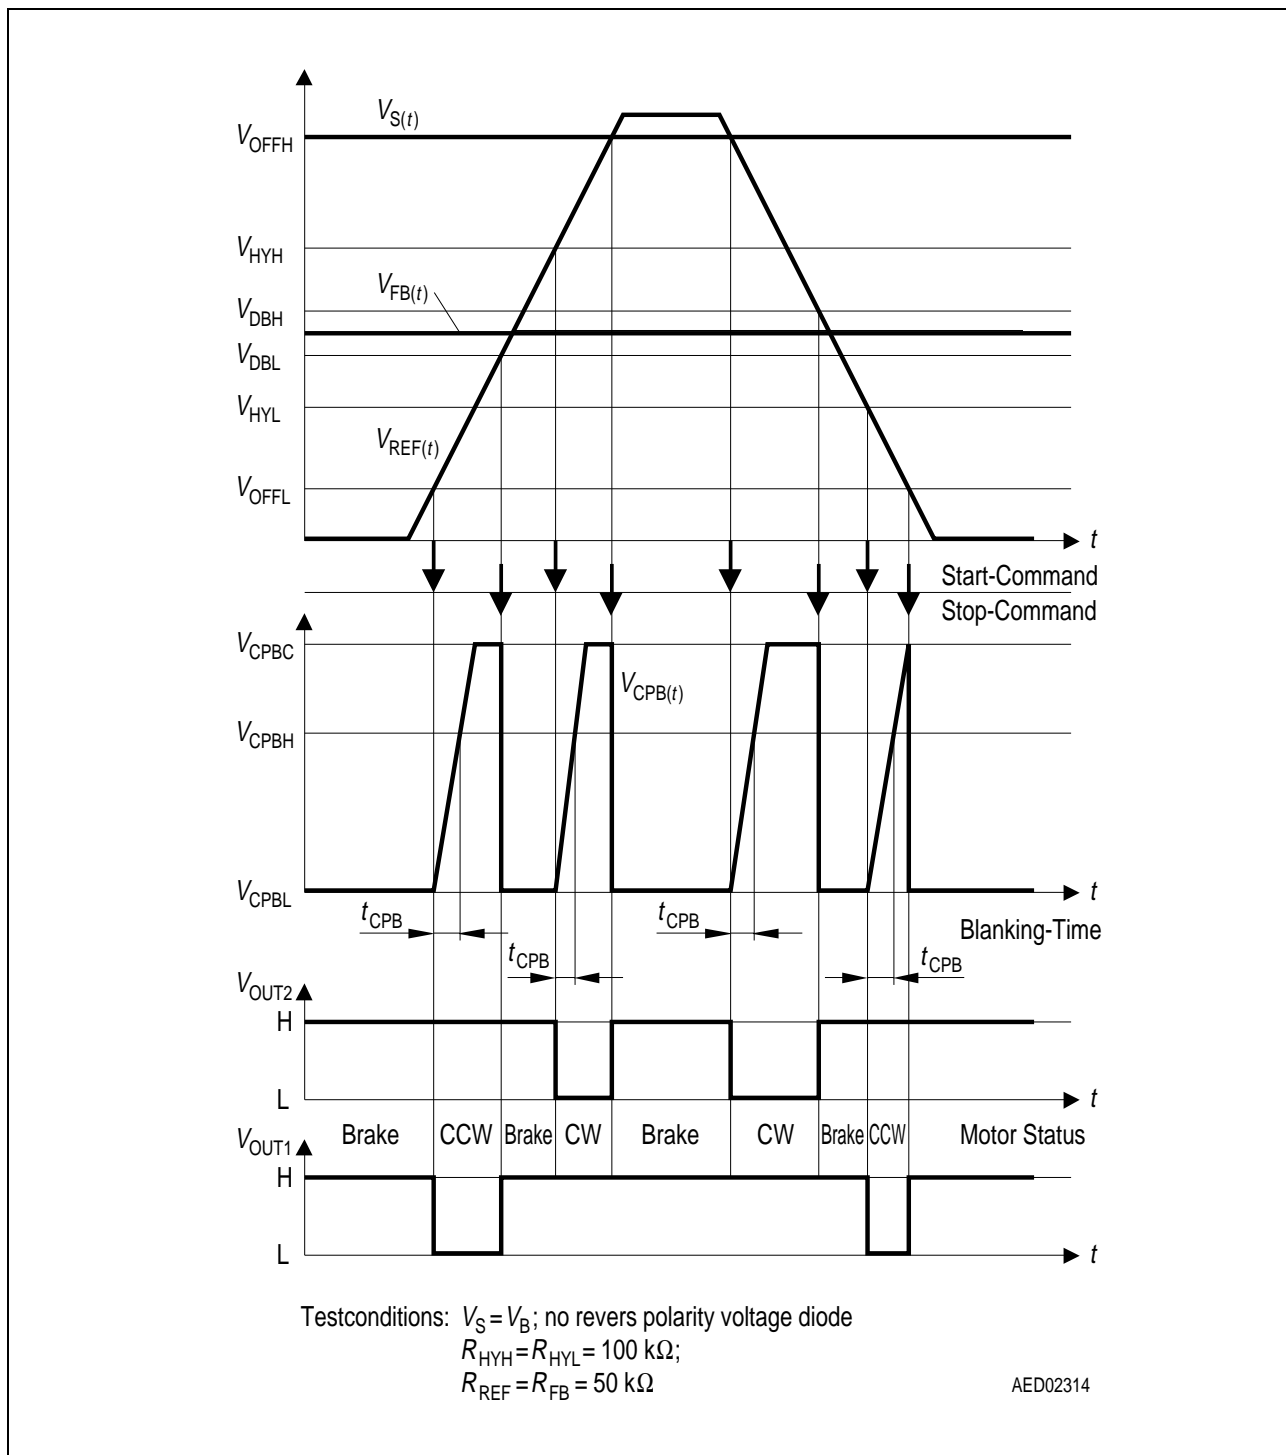


Figure 5 Timing and Phaselag

Package Outlines

P-DSO-14-4 (Plastic Dual Small Outline Package)

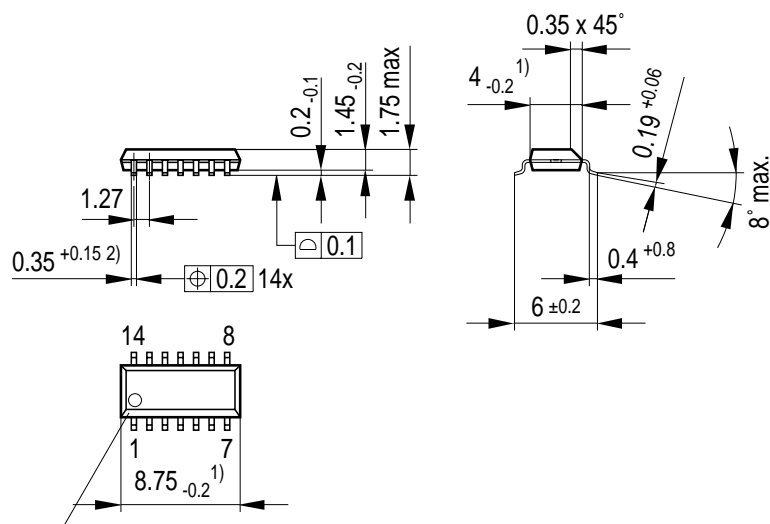

Index Marking

- 1) Does not include plastic or metal protrusion of 0.15 max. per side
- 2) Does not include dambar protrusion of 0.05 max. per side

GPS05093


Sorts of Packing

Package outlines for tubes, trays etc. are contained in our Data Book "Package Information".

SMD = Surface Mounted Device

Dimensions in mm

P-DIP-16-5
(Plastic Dual In-line Package)

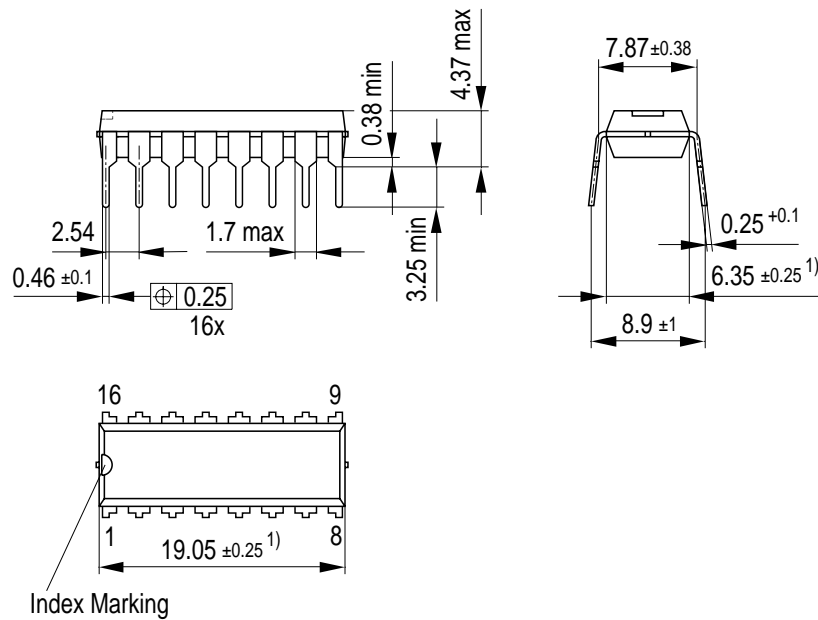

1) Does not include plastic or metal protrusion of 0.25max per side

GPD05585

Sorts of Packing

Package outlines for tubes, trays etc. are contained in our Data Book "Package Information".

Dimensions in mm

This datasheet has been downloaded from:

www.EEworld.com.cn

Free Download

Daily Updated Database

100% Free Datasheet Search Site

100% Free IC Replacement Search Site

Convenient Electronic Dictionary

Fast Search System

www.EEworld.com.cn