

# RELAYS & SOLENIIDS

| PartNo. | ProductNo. | Description     | ContactArrangement | ContactRating   | CoilVoltage | RecognizedSafety | QutlineLxWxH |
|---------|------------|-----------------|--------------------|-----------------|-------------|------------------|--------------|
| 13442   | LE-48TW    | 繼電器LE-48TW LE   | 1PST/1PDT          | DC24V/10A       | 48Vdc       | TUV,UL,CUL       | 21.5*16*17   |
| 2906    | LE-5TW     | 繼電器COIL5VdcLE   | 1PDT               | 120Vac24Vdc/10A | 5Vdc        | UL,TUV           | 21.5*16*16.5 |
| 4467    | LE-6TW     | 繼電器COIL: 6VdcLE | 1PDT               | 120Vac24Vdc/10A | 6Vdc        | UL,TUV           | 21.5*16*16.5 |
| 4468    | LE-9TW     | 繼電器COIL: 9VdcLE | 1PDT               | 120Vac24Vdc/10A | 9Vdc        | UL,TUV           | 21.5*16*16.5 |




## Specifications/SpecialFeatures:

- Size(LxWxH):19.5x15.8x15mm
- Contactarrangement:1PDT
- Contactrating(resistiveload):120VAC/10A, 24VDC/10A240VAC/10A
- Coilvoltage:3VDC、5VDC、12VDC、24VDC
- Coilpower(nominal):0.36W(DC)
- Breakdownvoltage:Betweencontacts:750VAC Betweenallelements:1500VAC
- Insulationresistance:500VDC,100Mohms
- Life(min.operation):Mechanical:10<sup>7</sup> Electrical(atratedload):10<sup>5</sup>
- Approximateweight:9g

## Safety/QualityApprovals:

- TUV
- UL
- CUL

RELAY



| PartNo. | ProductNo. | Manuf. | Description | ContactArrangement | ContactRating    | CoilVoltage | RecognizedSafety | QutlineLxWxH |
|---------|------------|--------|-------------|--------------------|------------------|-------------|------------------|--------------|
| 8193    | LEG-12T    | RAYEX  | PCB繼電器LEG   | 1PDT               | 120VAC/24VDC/10A | 12Vdc       | UL,TUV           | 19.5*15.8*15 |
| 2294    | LEG-24T    | RAYEX  | PCB繼電器LEG   | 1PDT               | 120VAC/24VDC/10A | 24Vdc       | UL,TUV           | 19.5*15.8*15 |
| 10355   | LEG-3T     | RAYEX  | PCB繼電器LEG   | 1PDT               | 120VAC/24VDC/10A | 3Vdc        | UL,TUV           | 19.5*15.8*15 |
| 3604    | LEG-5T     | RAYEX  | PCB繼電器LEG   | 1PDT               | 120VAC/24VDC/10A | 5Vdc        | UL,TUV           | 19.5*15.8*15 |




## Specifications/SpecialFeatures:

- Size(LxWxH):29x12.5x25.5mm
- Contactarrangement:1PST,1PDT
- Contactrating(resistiveload):250VAC/10A, 30VDC/10A
- Coilvoltage:5VDC,12VDC,24VDC
- Coilpower(nominal):0.53W(DC)
- Breakdownvoltage:Betweencontacts:1000VAC Betweenallelements:5000VAC
- Insulationresistance:500VDC,100Mohms
- Life(min.operation):Mechanical:10<sup>7</sup> Electrical(atratedload):10<sup>5</sup>
- Approximateweight:16g

## SafetyStandardApproval

- UL,CUL

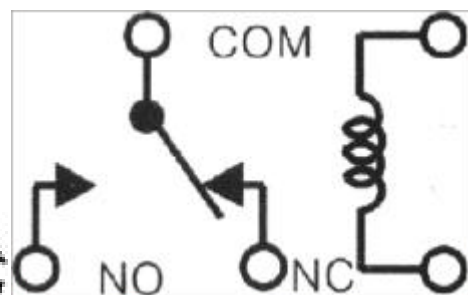

| PartNo. | ProductNo. | Manuf. | Description  | ContactArrangement | ContactRating        | CoilVoltage | RecognizedSafety | QutlineLxWxH |
|---------|------------|--------|--------------|--------------------|----------------------|-------------|------------------|--------------|
| 2276    | LM1-12D    | RAYEX  | PCB 功率繼電器LM1 | 1PDT               | 10A 240Vac/10A 30Vdc | 12Vdc       | UL,CUL           | 29*12.5*25.5 |
| 2277    | LM1-24D    | RAYEX  | PCB 功率繼電器LM1 | 1PDT               | 10A 240Vac/10A 30Vdc | 24Vdc       | UL,CUL           | 29*12.5*25.5 |
| 2902    | LM1-5D     | RAYEX  | PCB 功率繼電器LM1 | 1PDT               | 10A 240Vac/10A 30Vdc | 5Vdc        | UL,CUL           | 29*12.5*25.5 |




## Specifications/SpecialFeatures:

- Size(LxWxH):29.4x12.5x25.5mm
- Contactarrangement:2PST,2PDT
- Contactrating(resistiveload):250VAC/5A, 30VDC/5A
- Coilvoltage:5VDC,12VDC,24VDC,48VDC
- Coilpower(nominal):0.53W(DC)
- Breakdownvoltage:Betweencontacts:1000VAC Betweenallelements:5000VAC
- Insulationresistance:500VDC,100Mohms
- Life(min.operation):Mechanical:10<sup>7</sup> Electrical(atratedload):10<sup>5</sup>
- Approximateweight:17g

## Safety/QualityApprovals:

- TUV
- UL
- CUL

RELAY

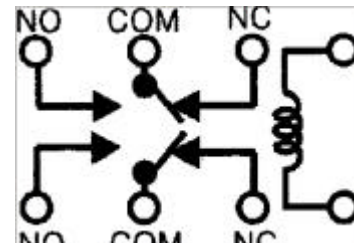

| PartNo. | ProductNo. | Manuf. | Description | ContactArrangement | ContactRating        | CoilVoltage | RecognizedSafety | QutlineLxWxH |
|---------|------------|--------|-------------|--------------------|----------------------|-------------|------------------|--------------|
| 2903    | LM2-05D    | RAYEX  | PCB功率繼電器LM2 | 2PDT               | 5A 250Vac/ 10A 30Vdc | 5Vdc        | UL,CUL           | 29*12.5*25.5 |
| 2272    | LM2-12D    | RAYEX  | PCB功率繼電器LM2 | 2PDT               | 5A 240Vac/ 5A30Vdc   | 12Vdc       | UL,CUL           | 29*12.5*25.5 |
| 2273    | LM2-24D    | RAYEX  | PCB功率繼電器LM2 | 2PDT               | 5A 240Vac/ 5A30Vdc   | 24Vdc       | UL,CUL           | 29*12.5*25.5 |
| 3376    | LM2-48D    | RAYEX  | PCB功率繼電器LM2 | 2PDT               | 5A 240Vac/ 5A30Vdc   | 48Vdc       | UL,CUL           | 29*12.5*25.5 |




## Specifications/SpecialFeatures:

- Size(LxWxH):21.8x16.8x14.2mm
- Contactarrangement:1PDT
- Contactrating(resistiveload):120VAC/10A, 24VDC/10A240VAC/6A
- Coilvoltage:12VDC、24VDC、48VDC
- Coilpower(nominal):0.36W(DC)、0.45W(DC)
- Breakdownvoltage:Betweencontacts:750VAC Betweenallelements:1,500VAC
- Insulationresistance:500VDC,100Mohms
- Life(min.operation):Mechanical:10<sup>7</sup> Electrical(atratedload):10<sup>5</sup>
- Approximateweight:10g

## Safety/QualityApprovals:

- TUV
- UL
- CUL

RELAY



| PartNo. | ProductNo. | Manuf. | Description | ContactArrangement | ContactRating         | CoilVoltage | RecognizedSafety | QutlineLxWxH   |
|---------|------------|--------|-------------|--------------------|-----------------------|-------------|------------------|----------------|
| 2268    | LT-12G     | RAYEX  | PCB繼電器LT    | 1PDT               | 10A 120Vac/ 10A 24Vdc | 12Vdc       | TUV              | 21.8*16.8*14.2 |
| 11646   | LT-24G     | RAYEX  | PCB繼電器LT    | 1PDT               | 10A 120Vac/5A240Vdc   | 24Vdc       | TUV              | 21.8*16.8*14.2 |



胜特力材料有限公司

- 服務專線: 886-3-5753170
- 24小時傳真: 886-3-5753172
- E-mail: sale@100y.com.tw

WWW.100Y.COM.TW

深圳胜特力电子有限公司

- 服務專線: 86-755-83298787
- 24小時傳真: 86-755-83640655
- Email: 100y@163.com

29-03